


TIGER Neo

66HL5-BDV

□ □ □ □ □ □ □ □ □

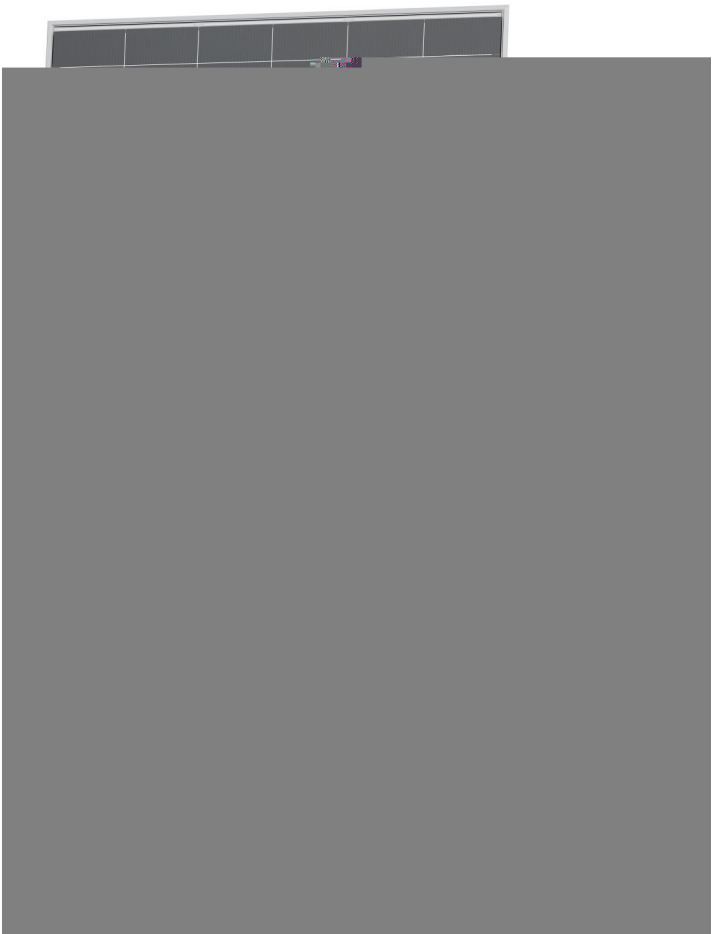

N 型技术

Tunnel Oxide Passivating
Contacts (TOPCon) N
LID/LeTID



HOT 3.0 技术

HOT 3.0 N



双面发电

LCOE



载荷能力

5400Pa
2400Pa




多主栅技术



抗 PID 保证

PID

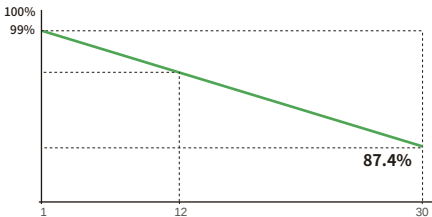

12 年 | 年 | 1 | .4

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015:
- ISO14001:2015:
- ISO45001:2018:



66HL5-

结构参数

IEC	

装标准

电性能参数 (STC)

	P _{max} [W]
	V _{mp} [V]
	I _{mp} [A]
	V _{oc} [V]
	I _{sc} [A]
	[]
	Pr
	Vo
	Isc

(STC)

电性能参数 (BNPI)

	P _{max} [W]
	V _{mp} [V]
	I _{mp} [A]
	V _{oc} [V]
	I _{sc} [A]
	(BNPI)

应用条

T ₉₈	